Project CEST-GIDA 2025 Turnover of Equipment for Chocolate Production Business

AY 2025-2026

1.4.2 Local start-up financial assistance

1.4.2 Local start-up financial assistance

Republic of the Philippines
Davao de Oro State College
Poblacion, Compostela, Davao de Oro Province

PROJECT MANAGEMENT UNIT

Website: www.ddosc.edu.ph Email: projectdev.main@ddosc.edu.ph

PROJECT NAME	:	**SUPPLY AND DELIVERY OF MATERIALS FOR THE CONSTRUCTION OF SCREEN HOUSE AT NEW LEYTE NATIONAL HIGHSCHOOL MACO, DAVAO DE ORO - (CEST 2025)**	CONTROL NO:	***2026-033***
LOCATION	:	NEW LEYTE NATIONAL HIGH SCHOOL, MACO DAVAO DE ORO	DIMENSION:	***SEE PLAN***
ABC	:	50,000.00	Classification:	***Construction***
SUBJECT	:	**POW (PROGRAM OF WORKS BUDGET COST)**	SOURCE OF FUND	***15 CD***
MODE	:	BY ADMIN	SOURCE OF FUND:	
DATE	:	20-Apr-26		

ITEM	DESCRIPTION	QTY	UNIT	UNIT COST	AMOUNT
I	**Concrete Works**			P	1,860.00
	Cement	3.00	l.s	220.00	660.00
	Mixed Sand and Gravel	1.00	cu.m	1,200.00	1,200.00
II	**STEEL WORKS**			P	30,140.00
	1-1/2" x 6m length G.I Pipe, Sch. 40	8.00	lngth	1,500.00	12,000.00
	1" x 6m length G.I Pipe, Sch. 40	13.00	lngth	1,000.00	13,000.00
	10mm x 6m length dia. Plain Round Bars	18.00	lngth	230.00	4,140.00
	Welding Rod, 5kg per box	1.00	box	1,000.00	1,000.00
III	**FINISHING WORKS**			P	6,000.00
	Mesh net 2m x 50m (black) - Side Wall	1.00	pcs	2,500.00	2,500.00
	50% Shade net 2m x 50m (black) - Roof	1.00	pcs	2,120.00	2,120.00
	3x3 Ball bearing hinges	1.00	set	150.00	150.00
	4x300mm Cable tie (100 pcs per pack), black	6.00	pack	150.00	900.00
	Metal cutting disc	7.00	pcs	40.00	280.00
	Grinding disc	1.00	pcs	50.00	50.00
IV	**MATERIAL COST**				30,000.00
V	**LABOR COST**				12,000.00
VI	**TOTAL PROJECT COST**			Php	50,000.00

Submitted by:

ENGR. IAN DAVE P. GORTEZA
Project Management Unit Head

Recommending Approval:

KIM F. BALOCA, CPA
Chief for Admin and Finance

Approved by:

LILYBETH M. MATUNHAY
SUC President I

Republic of the Philippines
DAVAO DE ORO STATE COLLEGE
Province of Davao de Oro
www.ddosc.edu.ph | extensionservices@ddosc.edu.ph

FY 2025 WORK AND FINANCIAL PLAN

Office/Division/Section/Unit: **EXTENSION SERVICES DIVISION**
Campus: **MAIN CAMPUS**

TRUST FUND

ORGANIZATIONAL OUTCOMES	PROGRAMS/ACTIVITIES/PROJECTS	PERIOD OF IMPLEMENTATION	PERSONNEL SERVICES (PS)	MAINTENANCE AND OTHER OPERATING EXPENSES(MOOE)					CAPITAL OUTLAY(CO)	TOTAL
			Honoraria	Office Supplies Expense	Semi-Expendable ICT Equipment	Semi-Expendable Technical and Scientific Equipment	Semi-Expendable Furnitures, Fixtures and Books	Representation	Rent - Motor Vehicle	Technical and Scientific Equipment	
	Community Empowerment through Science and Technology for the Geographically Isolated and Disadvantaged Areas, Indigenous People, and Marginalized Communities in Davao de Oro ***(CEST Davao de Oro 2025)***	September-December			54,500.00	195,500.00	20,000.00	50,000.00	50,000.00	100,000.00	470,000.00
TOTAL			-	-	**54,500.00**	**195,500.00**	**20,000.00**	**50,000.00**	**50,000.00**	**100,000.00**	**470,000.00**
BUDGET CEILING			-	-	**54,500.00**	**195,500.00**	**20,000.00**	**50,000.00**	**50,000.00**	**100,000.00**	**470,000.00**
REALIGNMENT											
VARIANCE			-	-	-	-	-	-	-	-	-

Prepared by:
JESON N. GEROCHE, Ph.D.
Director, Extension Services Division

Reviewed by:
AIMEE LYN TORREON
Budget Officer III

Recommending Approval:
KIM P. BALOCA,CPA
Chief for Administration and Finance

Approved by:
LILYBETH M. MATUNHAY
SUC President I

Republic of the Philippines
DAVAO DE ORO STATE COLLEGE
Province of Davao de Oro
www.ddosc.edu.ph |extensionservices@ddosc.edu.ph

PROJECT PROCUREMENT MANAGEMENT PLAN (PPMP)
FY 2025

End User / Unit: EXTENSION SERVICES DIVISION -MAIN CAMPUS
Charge To: TRUST FUND

CODE	GENERAL DESCRIPTION	QUANTITY / SIZE	ESTIMATED BUDGET	Mode of Procureme	SCHEDULE / MILESTONE OF ACTIVITIES											
					JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC
	Mats and Snacks	Pax	50,000.00	Small Value Procurement									Procurement Process	Procurement Process	Procurement Process	DELIVERY
	Greenhouse	Lot	50,000.00	Small Value Procurement									Procurement Process	Procurement Process	Procurement Process	DELIVERY
	PRINTER Print, Scan, Copy with ADF (Fax optional) Interface: USD 2.0, Network, Ethernet, Wi-Fi IEEE 802.11 a/g/n, Wi-Fi Direct, Infrared Protocol: TCP/IPv4, TCP/IPv6) Operating System Capabilities from Windows XP to Windows 11 or Windows Server Print Speed: Approx. 19 sec per photo (borderless) / 90 sec per photo (borderless); Draft (Black/Color — up to 30ppm/15ppm), A4 Simplex (Black/Colour — up to 10 ipm/5 ipm), First page out time from ready mode (black/color): approx. 10 sec/ 19sec) Copying: 99 copies max with 25% to 400% reduction/enlargement, max copy resolution: 600x600 dpi, max copy size: legal Scanning: Flatbed colour image scanner, CIS sensor type, 1200x2400 dpi optical resolution, max scan size of 216x297mm, scan speed of 200 dpi (black: 12secs/up to 4.5 ipm and colour: 24sec / up to 4.5 ipm) ADF Specification: paper thickness — 64-90g/m² with paper capacity: 30 pages (A4), 10 pages (Legal) Electrical Specifications: Rated Voltage (AC 220 — 240 V), Rated Frequency (50/60) Hz), Operating (13W), Sleep (0.7W), Power Off (0.2W), Standby (4.5W) L3210 ink (1 set)	Unit	20,000.00	Small Value Procurement									Procurement Process	Procurement Process	Procurement Process	DELIVERY
	Tools for keychain and Souvenirs Production	Lot	50,000.00	Small Value Procurement									Procurement Process	Procurement Process	Procurement Process	DELIVERY
	Weighing Scale 1Kg capacity (Digital) (5 pieces)	5	2,000.00										Procurement Process	Procurement Process	Procurement Process	DELIVERY
	Weighing Scale 150kg (Analog) (5 pieces) Dimension: 290x280x310mm Model: FTX-15 Max Capacity-150g Graduation/Readability (kg)- 3.05	5	25,000.00	Small Value Procurement									Procurement Process	Procurement Process	Procurement Process	DELIVERY
	Moisture meter (5 pieces) -Moisture Range: Cacao beans typically require a moisture range of 6-24% or 4-20% -Accuracy: Aim for a meter with high accuracy, such as ± 0.5 % -Readout:Digital displays with features like automatic temperature compensation and quick readings are beneficial -Features: Consider metres with built-in scales, self testing, and options for connecting to computers (USB/RS-232) **Thermometer Specifications: (5 pieces)** Type A digital thermometer with a probe or infrared thermometer would be suitable. Range: Ensure the thermometer can measure ambient temperatures in the range. Accuracy: Accuracy of ± 1°C or better is recommended	5	20,000.00	Small Value Procurement									Procurement Process	Procurement Process	Procurement Process	DELIVERY
	Mini Dehydrator 167 (With Delivery) MINI DEHYDRATOR ST-01 Power: 1000w Voltage: 220v-50hz 1 p Temperature: 35-70 °C adjustable time adjustable Trays: 16 trays Tray size: 39*39 cm Machine size: 45*42*36 cm Stainless steel Digital control Weight: 27kg	1	33,000.00	Small Value Procurement									Procurement Process	Procurement Process	Procurement Process	DELIVERY
	Electric and Gas Operated Griddle HEG 600 Dimension: 550*520*320 mm Volts: 220v Power: 2.2kw Temp Control: 50-300 Deg C	1	12,500.00	Small Value Procurement									Procurement Process	Procurement Process	Procurement Process	DELIVERY
	Electric and Manual Operated Mini De Oiler Machine Voltage: 220v Power: 180w Unit Size: 467*176 mm Weight: 25kg Capacity: 4L	1	23,000.00	Small Value Procurement									Procurement Process	Procurement Process	Procurement Process	DELIVERY
	OFFICE TABLE (customized) Specifications (WIDTH: at least 1,500mm x 700mm x 750+mm made of wood, top layer is sawn and has a smooth finish making it a hassle-free workspace. With two long rows of storage shelves with rods on either side of the table with steel handles to open and close them quickly	1	10,000.00	Small Value Procurement									Procurement Process	Procurement Process	Procurement Process	DELIVERY

CODE	GENERAL DESCRIPTION	QUANTITY / SIZE	ESTIMATED BUDGET	Mode of Procureme	SCHEDULE / MILESTONE OF ACTIVITIES											
					JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC
	Cabinet • Size: 90x46 cm; • Height: 44 cm; • Weight: 4 kg. • About this item Available in 2 colors, oak and walnut • This mobile cabinet keeps the office machines, paper, files, and other things organized, the top also serves as an excellent printer stand. • The rolling cabinet can be place beside or under the desk • With 2 compartments inside and 4 drawers and can be combine with THYS MOBILE CABINETS. • Dimensions Overall Width: 80 cm • Depth: 40 cm • Height: 58 cm • Materials MDF with Melamine panels, aluminum handle and wheels • Available Color Walnut • Oak • Product Weight 27 kgs • Weight Capacity 7 kgsDrawer • Assembly Required Yes • Care & Maintenance Wipe clean using a damp cloth and a mild cleaner. • Disclaimer PRODUCT IMAGE AND COLOR • Each product on the Wandaa Fiore website is a representation of the actual product. We attempt to display product images as accurately as possible. However, due to lighting and different devices you might be using, the color in the image may vary slightly from the actual color of the product.	1	5,000.00	Small Value Procurement									Procurement Process	Procurement Process	Procurement Process	DELIVERY
	Mono Block Chair (10 pieces)	10	5,000.00	Small Value Procurement									Procurement Process	Procurement Process	Procurement Process	DELIVERY
	43 inch UHD AI UA73 4k Smart TV 2025 43UA73050PSB **Key Features** Breathtaking colour and detail with 4K HDR10 Pro 4K picture quality, upscaled visual and surround sound from 4K Upscaling AI Processor Gen5 New AI button, voice controls, drag and drop functions on the AI Magic Remote Enjoy 4K Super Upscaling enhanced resolution, brightness, and clarity **High resolution on a massive Ultra Big TV screen** 4K Gen5 PICTURE (DISPLAY), Display Type: 4K UHD, Backlight Type: Direct, Display Resolution:4K Ultra HD (3,840 x 2,160), Refresh Rate:60Hz Native, **PICTURE (PROCESSING)** Picture Processor:α7 AI Processor 4K Gen5, Dynamic Tone Mapping , PI(LMMX)(TM MOOT, Auto Calibration, AI Upscaling, 4K Super Upscaling, HDR (High Dynamic Range): HDR10 / HLG, Picture Mode: (Vivid, Standard, Eco, Cinema, Game, Sports, Filmmaker Mode), Game Optimizer (Game Dashboard), **ACCESSIBILITY**, High Contrast, Gray Scale, GAMEWBOKS AND WEIGHTS, TV Dimensions without Stand (WxHxD, mm): 957 x 559 x 58.3, Packaging Dimensions (WxHxD, mm): 1070 x 650 x 113, TV Weight without Stand (kg): 6.1, Packaging Weight (kg): 8.2, TV Dimensions with Stand (WxHxD, mm): 957 x 607 x 237, TV Stand (WxD, mm): 677 x 237, TV Weight with Stand (kg): 6.2, VESA Mounting (WxH, mm):200 x 300, AUDIO, AI Sound: α7 AI Sound Pro (Virtual 9.1.2 Up-ring), LG Sound Sync, Simultaneous Audio Output, Audio Output:20W, Audio Codec:AC4, AC3(Dolby Digital), EAC3, HE-AAC, AAC, MP2, MP3, PCM, apt-X (Refer to manual), Speaker System: 2.0 channel, Clear Voice Pro (Auto Volume Leveling), Sound Mode Share, Bluetooth Surround Ready , Of Way Playback), AI Acoustic Tuning, **CONNECTIVITY**, HDMI Audio Return Channel, , Ethernet Input: Yes, SPDIF (Optical Digital Audio Out RF Input (Antenna/Cable): 2ea, Wi-Fi (Wi-Fi 5), Bluetooth Support: (v 5.1), Simplink (HDMI CEC) HDMI Input: 3ea (supports eARC, ALLM), USB Input: 2ea (v 2.0), **SMART TV,** Operating System (OS): webOS 25, AI Chatbot, Google Cast, Home Hub, Magic Remote Control, Built-In, Voice ID, Works with Apple Home,USB Camera Compatible,Full Web Browser,Google Home / Hub, Intelligent Voice Recognition, Smartphone Remote App, Yes (LG ThinQ)Alexa with Apple Airplay, **POWER,** Power Supply (Voltage, Hz): AC 100~240V 50/60 Hz,ACCESSORIES INCLUDED, Remote Magic Remote MR25,BROADCASTING,Analog TV Reception,Standby Power Consumption, Under 0.5W,Power Cable (Attached), Digital TV Reception :DVB-T2/T (Terrestrial), DVB-C (Cable) / ISDB-T (Terrestrial, only Philippines)	1	34,500.00	Small Value Procurement									Procurement Process	Procurement Process	Procurement Process	DELIVERY
	Boarding (Coffee) Roasting Machine Capacity: 5-6 kg/batch Stainless Steel Drum Motor: 90w Heating: Gas type LPG No Temp Set up Size: 132*80*90 cm Weight: 60kg With Temperature Monitoring With Gas Hose, Regulator, Control and Ignitor With Delivery and Demo	Unit	100,000.00										Procurement Process	Procurement Process	Procurement Process	DELIVERY
	Rest-Moto Vehicle	lot	50,000.00													

Total Budget: 470,000.00

Note: Technical Specification/Scope of Work/Terms of Reference for each item/project being proposed shall be submitted as part of the PPMP

Prepared by:
JESON A. GERVOCHE, Ph.D.
Director, Extension Services Division

Certified Funds Available:
ROTCHIL G. PASTRO,CPA
Accountant

Recommending Approval:
GLORYMEL C. ALTAMERA,PhD.
BAC Chairperson

Approved by:
LILYBETH M. MATUNHAY
SUC President I

DOST Form 4

DEPARTMENT OF SCIENCE AND TECHNOLOGY
Project Line-Item Budget
As of October 1, 2025

Program Title : Community Enhancement through Science and Technology
Project Title : Community Enhancement through Science and Technology: Empowering Marginalized Communities in Davao de Oro
Implementing Agency : Davao de Oro State College
Total Duration : 12 Months
Current Duration : January 2, 2025- July 2, 2026
Project Leader : Jerson M. Renegado
Monitoring Unit : Department of Science and Technology XI - PSTO Davao de Oro
Project Coordinator : Grace A. Ricardo

Particulars			DOST XI Funding				Counterpart Funding
			AS APPROVED	PROPOSED 1ST REALIGNMENT			Implementing Agency
			TOTAL	DOST XI - Managed	Downloaded to IA	Total	Total
I.	**Personal Services**	P					
	Direct Cost						
	Salaries						
	Honoraria						
	Indirect Cost						
	Sub-total for PS	**P**	-	-	-	-	-
II.	**Maintenance and Other Operating Expenses**						
	Supplies and Materials						
	Office Supplies		23,944.45	22,315.75		22,315.75	50,000.00
	Drugs and Medicine Expenses					-	
	Semi-Expendables		290,000.00	650.00	270,000.00	270,650.00	50,000.00
	Fuel, Oils, and Lubricants		90,000.00	31,190.30		31,190.30	
	Other Supplies		30,000.00	25,515.40		25,515.40	50,000.00
	Medical Expenses						50,000.00
	Training and For a Expenses						
	Training and Fora Supplies		50,000.00	7,566.00		7,566.00	
	Training and For a Representation		130,000.00	77,190.00		77,190.00	100,000.00
	Travel Expenses		50,000.00	113,311.00		113,311.00	
	Printing and Binding Expenses		25,000.00	60,070.00		60,070.00	
	Taxes, Duties, and Licenses			100.00		100.00	
	Postage and Courier			549.00		549.00	
	Repairs and Maintenance						100,000.00
	Professional Services						
	Legal Services						
	Other Professional Services		10,000.00	20,000.00		20,000.00	
	Laboratory Tests		20,000.00			-	
	Communication						
	Rent Expenses		70,000.00	13,800.00	50,000.00	63,800.00	
	Utilities						
	Transportation and Delivery						100,000.00
	Representation		90,000.00	146,092.00	50,000.00	196,092.00	
	Other MOOE						
	Sub-total for MOOE	**P**	**878,944.45**	**518,349.45**	**370,000.00**	**888,349.45**	**500,000.00**
III.	**Equipment Outlay**						
	Equipment for Agri-products Processing		100,000.00		100,000.00	100,000.00	
	Sub-total for EO	**P**	**100,000.00**	**-**	**100,000.00**	**100,000.00**	**-**
	GRAND TOTAL	**P**	**978,944.45**	**518,349.45**	**470,000.00**	**988,349.45**	**500,000.00**
					Percentage Counterpart of IA:		**34%**

* Chargeable against the CY ____ DOST-GIA ____

Submitted by:

JERSON M. RENEGADO
Project Leader, IA

Recommending Approval:

ENGR. LAARNIE D. ALBACITE
ARD or PSTD, DOST XI

Digitally signed by Albacite Laarnie Davines

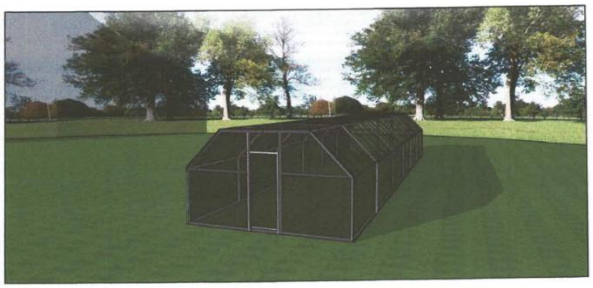
Budget Allocation Certified by:

MARY JOY R. MARTINEZ
Budget Officer, DOST XI

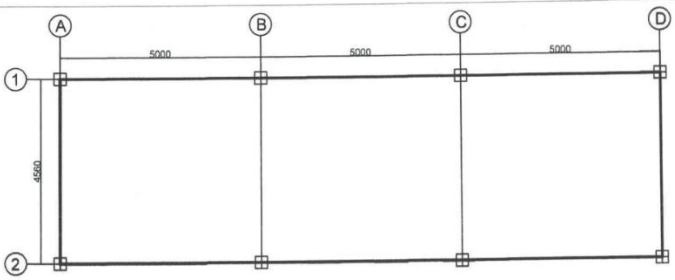
Approved by:

Digitally signed by Sales Anthony Cinco

DR. ANTHONY C. SALES, PFT, CESO III
Regional Director, DOST XI

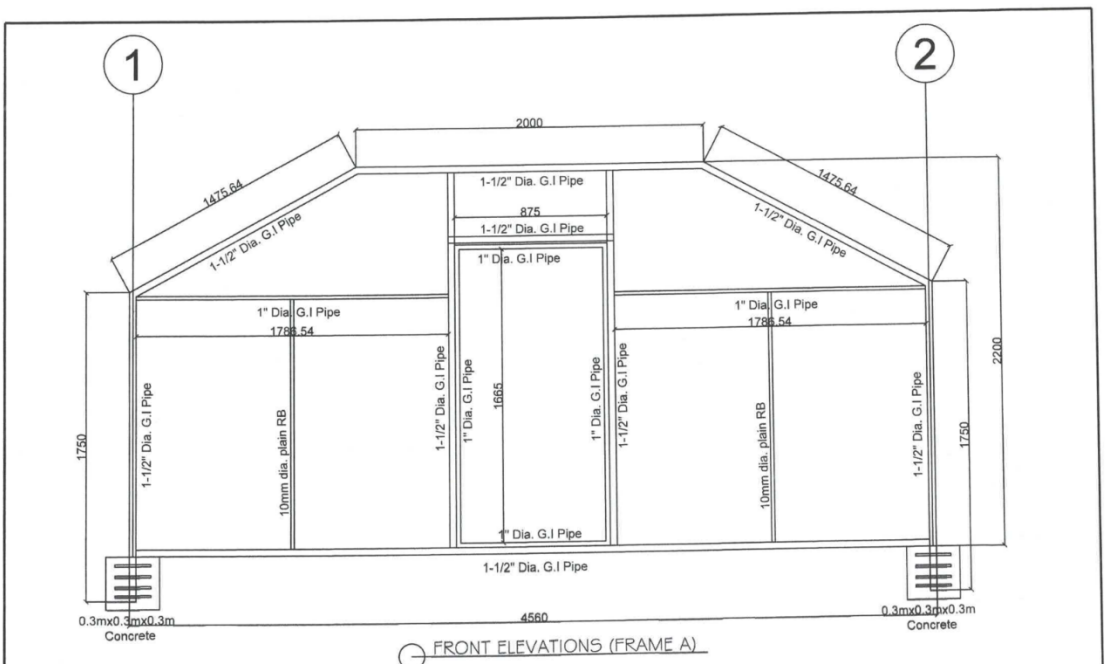


PERSPECTIVE



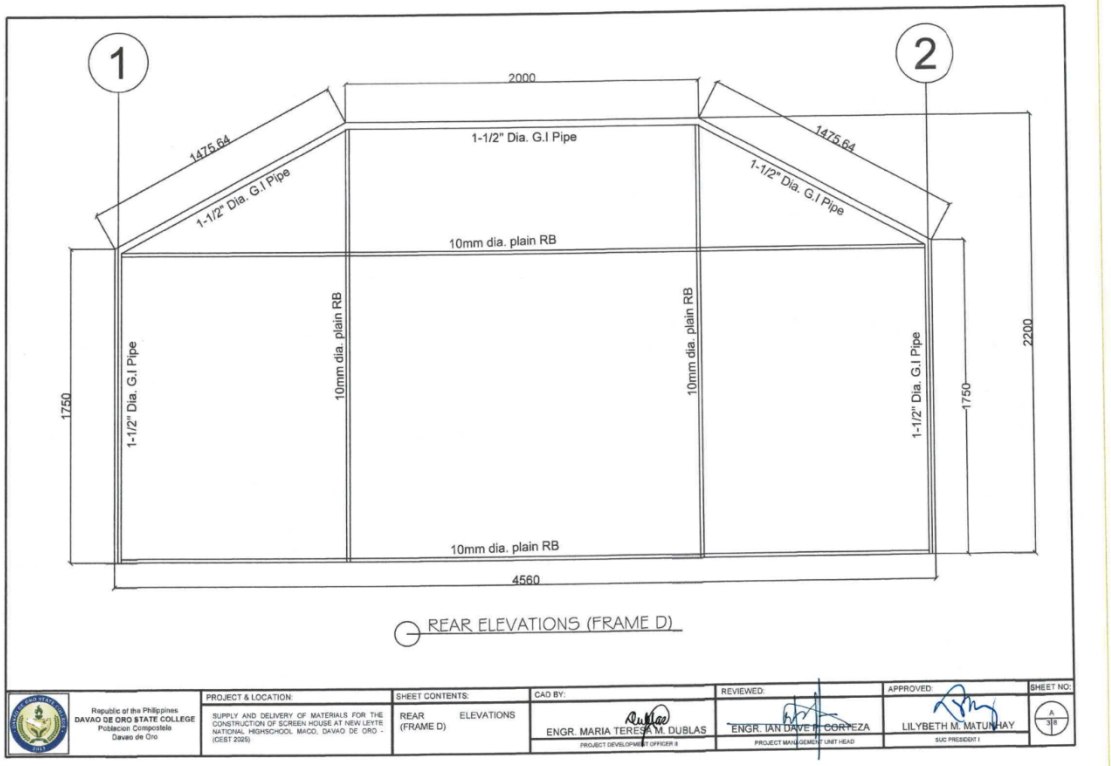
FLOOR PLAN

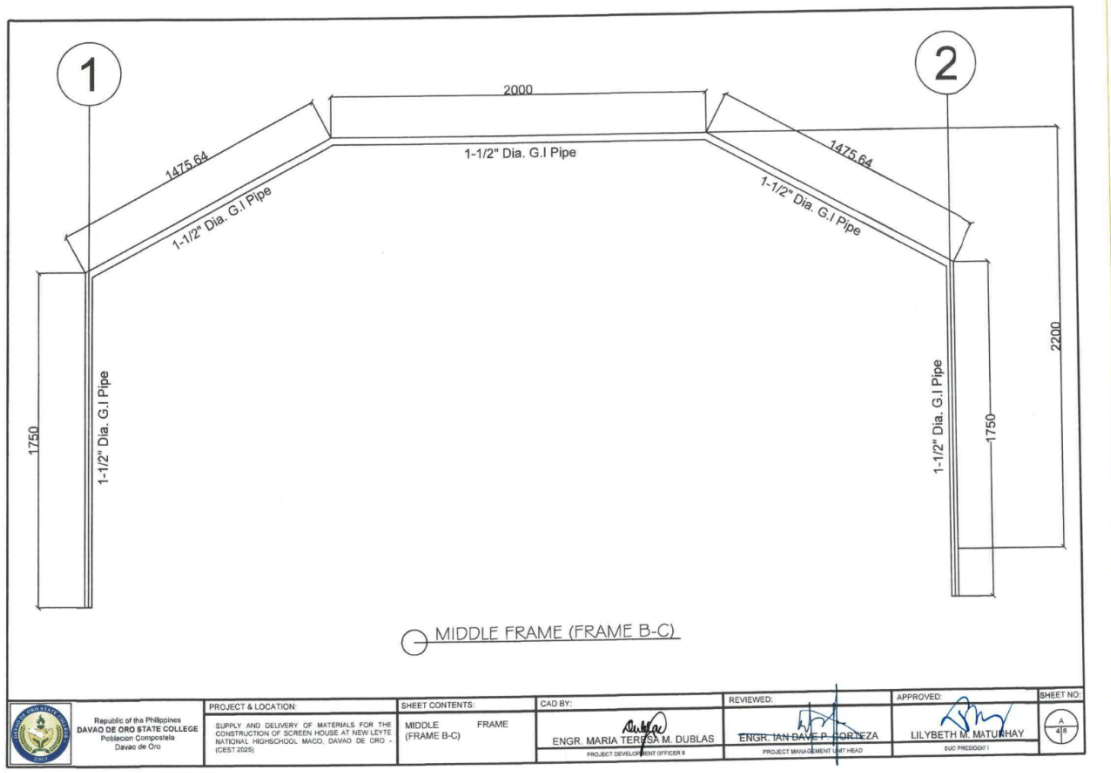
Republic of the Philippines DAVAO DE ORO STATE COLLEGE Poblacion Compostela Davao de Oro	PROJECT & LOCATION: SUPPLY AND DELIVERY OF MATERIALS FOR THE CONSTRUCTION OF SCREEN HOUSE AT NEW LEYTE NATIONAL HIGHSCHOOL MACO, DAVAO DE ORO - (CEST 2025)	SHEET CONTENTS: PERSPECTIVE AND FLOOR PLAN	CAD BY: ENGR. MARIA TERESA M. DUBLAS PROJECT DEVELOPMENT OFFICER II	REVIEWED: ENGR. IAN DAVE P. CORTEZA PROJECT MANAGEMENT UNIT HEAD	APPROVED: LILYBETH M. MATUNHAY SUC PRESIDENT I	SHEET NO: A-1/8

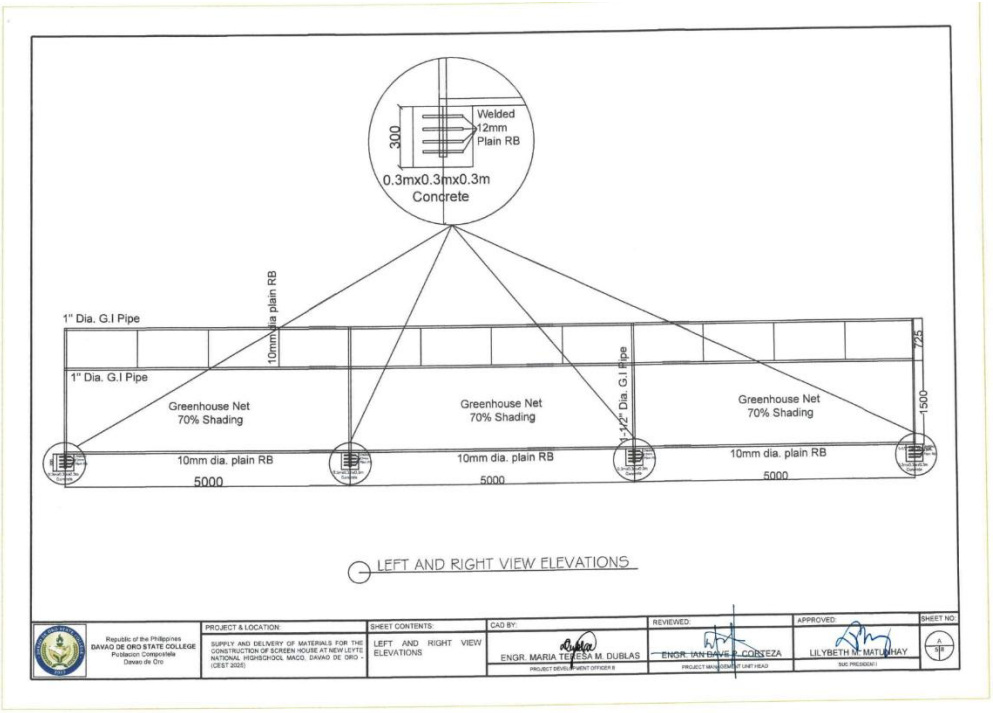


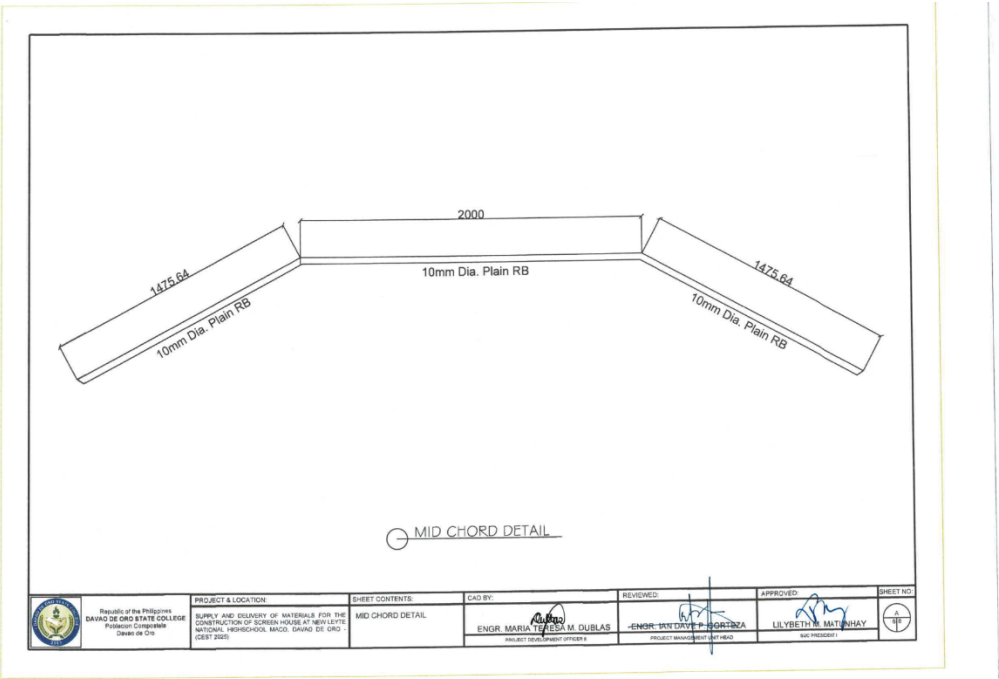
FRONT ELEVATIONS (FRAME A)

Republic of the Philippines DAVAO DE ORO STATE COLLEGE Poblacion Compostela Davao de Oro	PROJECT & LOCATION: SUPPLY AND DELIVERY OF MATERIALS FOR THE CONSTRUCTION OF SCREEN HOUSE AT NEW LEYTE NATIONAL HIGHSCHOOL MACO, DAVAO DE ORO - (CEST 2025)	SHEET CONTENTS: FRONT ELEVATIONS (FRAME A)	CAD BY: ENGR. MARIA TERESA M. DUBLAS PROJECT DEVELOPMENT OFFICER II	REVIEWED: ENGR. IAN DAVE P. CORTEZA PROJECT MANAGEMENT UNIT HEAD	APPROVED: LILYBETH M. MATUNHAY SUC PRESIDENT I	SHEET NO: A-2/8

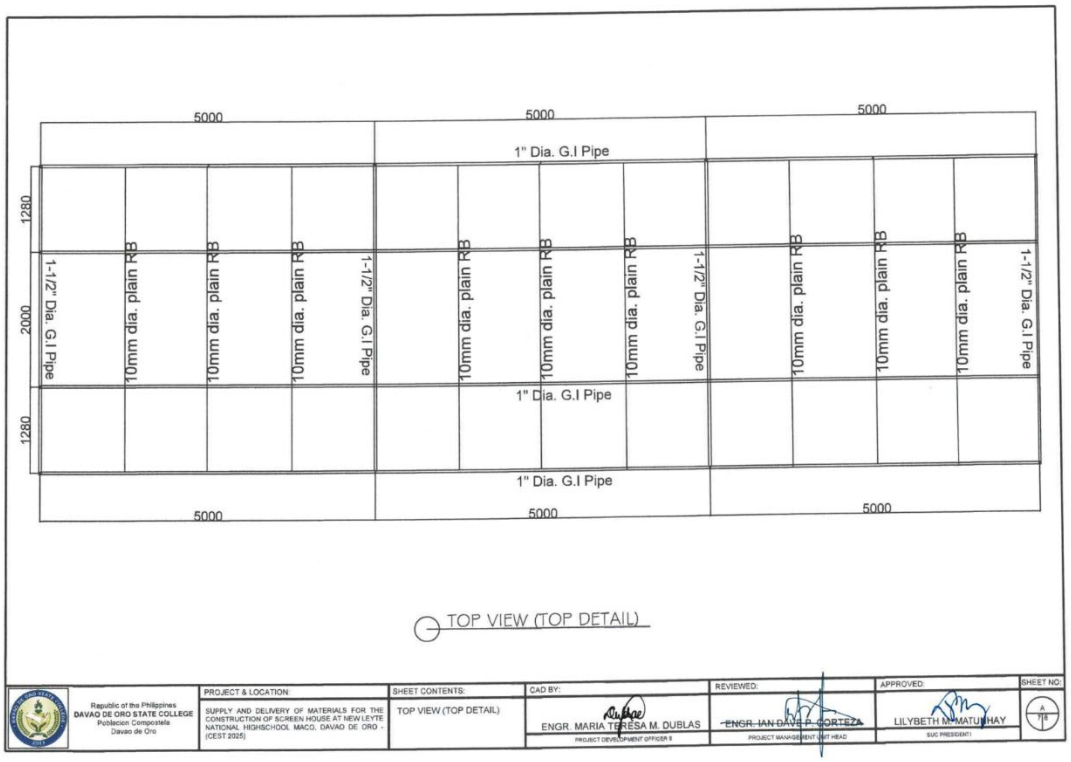

1
2
2000
1475.64
1475.64
1-1/2" Dia. G.I Pipe
1-1/2" Dia. G.I Pipe
1-1/2" Dia. G.I Pipe
10mm dia. plain RB
1-1/2" Dia. G.I Pipe
10mm dia. plain RB
10mm dia. plain RB
1-1/2" Dia. G.I Pipe
1750
1750
2200
10mm dia. plain RB
4560
REAR ELEVATIONS (FRAME D)
Republic of the Philippines
DAVAO DE ORO STATE COLLEGE
Poblacion Compostela
Davao de Oro
PROJECT & LOCATION:
SUPPLY AND DELIVERY OF MATERIALS FOR THE CONSTRUCTION OF SCREEN HOUSE AT NEW LEYTE NATIONAL HIGHSCHOOL MACO, DAVAO DE ORO - (CEST 2025)
SHEET CONTENTS:
REAR ELEVATIONS (FRAME D)
CAD BY:
ENGR. MARIA TERESA M. DUBLAS
PROJECT DEVELOPMENT OFFICER II
REVIEWED:
ENGR. IAN DAVE P. CORTEZA
PROJECT MANAGEMENT UNIT HEAD
APPROVED:
LILYBETH M. MATUNHAY
SUC PRESIDENT I
SHEET NO:
A
3/8

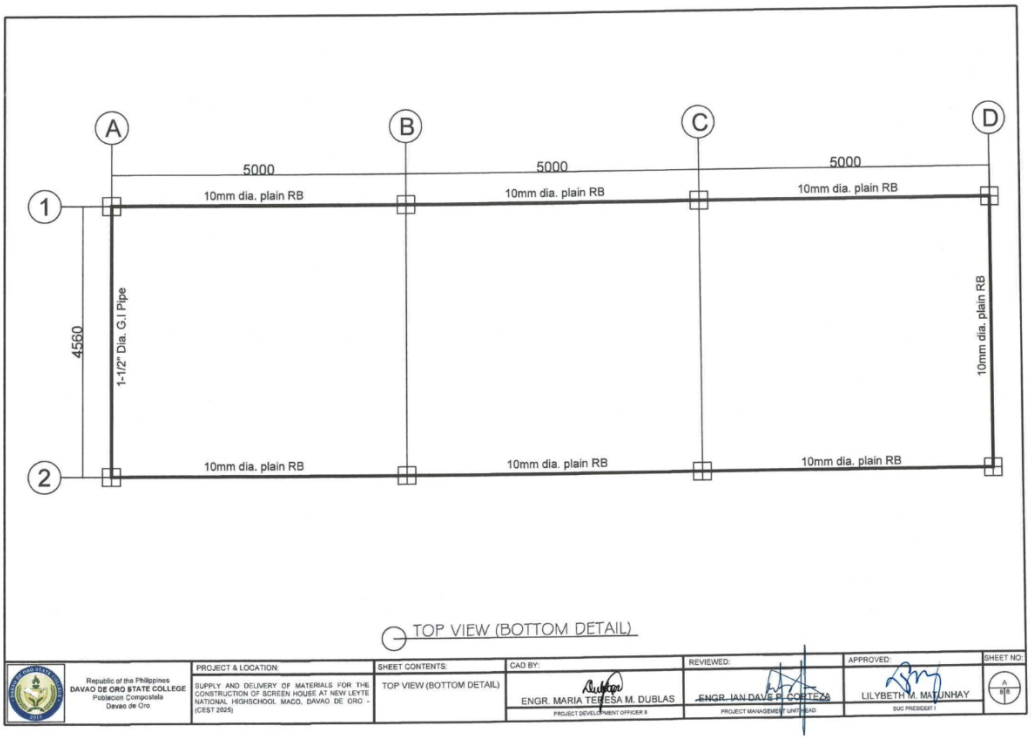

1
2
2000
1475.64
1475.64
1-1/2" Dia. G.I Pipe
1-1/2" Dia. G.I Pipe
1-1/2" Dia. G.I Pipe
1-1/2" Dia. G.I Pipe
1750
1750
2200
MIDDLE FRAME (FRAME B-C)
Republic of the Philippines
DAVAO DE ORO STATE COLLEGE
Poblacion Compostela
Davao de Oro
PROJECT & LOCATION:
SUPPLY AND DELIVERY OF MATERIALS FOR THE CONSTRUCTION OF SCREEN HOUSE AT NEW LEYTE NATIONAL HIGHSCHOOL MACO, DAVAO DE ORO - (CEST 2025)
SHEET CONTENTS:
MIDDLE FRAME (FRAME B-C)
CAD BY:
ENGR. MARIA TERESA M. DUBLAS
PROJECT DEVELOPMENT OFFICER II
REVIEWED:
ENGR. IAN DAVE P. CORTEZA
PROJECT MANAGEMENT UNIT HEAD
APPROVED:
LILYBETH M. MATUNHAY
SUC PRESIDENT I
SHEET NO:
A
4/8


Welded
12mm
Plain RB
300
0.3mx0.3mx0.3m
Concrete
10mm dia plain RB
1" Dia. G.I Pipe
1" Dia. G.I Pipe
Greenhouse Net
70% Shading
Greenhouse Net
70% Shading
1-1/2" Dia. G.I Pipe
Greenhouse Net
70% Shading
725
1500
10mm dia. plain RB
5000
10mm dia. plain RB
5000
10mm dia. plain RB
5000
LEFT AND RIGHT VIEW ELEVATIONS
Republic of the Philippines
DAVAO DE ORO STATE COLLEGE
Poblacion Compostela
Davao de Oro
PROJECT & LOCATION:
SUPPLY AND DELIVERY OF MATERIALS FOR THE CONSTRUCTION OF SCREEN HOUSE AT NEW LEYTE NATIONAL HIGHSCHOOL MACO, DAVAO DE ORO - (CEST 2025)
SHEET CONTENTS:
LEFT AND RIGHT VIEW ELEVATIONS
CAD BY:
ENGR. MARIA TERESA M. DUBLAS
PROJECT DEVELOPMENT OFFICER II
REVIEWED:
ENGR. IAN DAVE P. CORTEZA
PROJECT MANAGEMENT UNIT HEAD
APPROVED:
LILYBETH M. MATUNHAY
SUC PRESIDENT I
SHEET NO.
A
SP


2000
1475.64
10mm Dia. Plain RB
10mm Dia. Plain RB
1475.64
10mm Dia. Plain RB
MID CHORD DETAIL
Republic of the Philippines
DAVAO DE ORO STATE COLLEGE
Poblacion Compostela
Davao de Oro
PROJECT & LOCATION:
SUPPLY AND DELIVERY OF MATERIALS FOR THE CONSTRUCTION OF SCREEN HOUSE AT NEW LEYTE NATIONAL HIGHSCHOOL MACO, DAVAO DE ORO - (CEST 2025)
SHEET CONTENTS:
MID CHORD DETAIL
CAD BY:
ENGR. MARIA TERESA M. DUBLAS
PROJECT DEVELOPMENT OFFICER II
REVIEWED:
ENGR. IAN DAVE P. CORTEZA
PROJECT MANAGEMENT UNIT HEAD
APPROVED:
LILYBETH M. MATUNHAY
SUC PRESIDENT I
SHEET NO.
A
SP

.


5000
5000
5000
1" Dia. G.I Pipe
1280
2000
1280
1-1/2" Dia. G.I Pipe
10mm dia. plain RB
10mm dia. plain RB
10mm dia. plain RB
1-1/2" Dia. G.I Pipe
10mm dia. plain RB
10mm dia. plain RB
10mm dia. plain RB
1-1/2" Dia. G.I Pipe
10mm dia. plain RB
10mm dia. plain RB
10mm dia. plain RB
1-1/2" Dia. G.I Pipe
1" Dia. G.I Pipe
1" Dia. G.I Pipe
5000
5000
5000
TOP VIEW (TOP DETAIL)
Republic of the Philippines
DAVAO DE ORO STATE COLLEGE
Poblacion Compostela
Davao de Oro
PROJECT & LOCATION:
SUPPLY AND DELIVERY OF MATERIALS FOR THE CONSTRUCTION OF SCREEN HOUSE AT NEW LEYTE NATIONAL HIGHSCHOOL MACO, DAVAO DE ORO - (CEST 2025)
SHEET CONTENTS:
TOP VIEW (TOP DETAIL)
CAD BY:
ENGR. MARIA TERESA M. DUBLAS
PROJECT DEVELOPMENT OFFICER II
REVIEWED:
ENGR. IAN DAVE P. CORTEZA
PROJECT MANAGEMENT UNIT HEAD
APPROVED:
LILYBETH M. MATUNHAY
SUC PRESIDENT I
SHEET NO:
A
1/8


A
B
C
D
1
2
5000
5000
5000
10mm dia. plain RB
10mm dia. plain RB
10mm dia. plain RB
4560
1-1/2" Dia. G.I Pipe
10mm dia. plain RB
10mm dia. plain RB
10mm dia. plain RB
10mm dia. plain RB
TOP VIEW (BOTTOM DETAIL)
Republic of the Philippines
DAVAO DE ORO STATE COLLEGE
Poblacion Compostela
Davao de Oro
PROJECT & LOCATION:
SUPPLY AND DELIVERY OF MATERIALS FOR THE CONSTRUCTION OF SCREEN HOUSE AT NEW LEYTE NATIONAL HIGHSCHOOL MACO, DAVAO DE ORO - (CEST 2025)
SHEET CONTENTS:
TOP VIEW (BOTTOM DETAIL)
CAD BY:
ENGR. MARIA TERESA M. DUBLAS
PROJECT DEVELOPMENT OFFICER II
REVIEWED:
ENGR. IAN DAVE P. CORTEZA
PROJECT MANAGEMENT UNIT HEAD
APPROVED:
LILYBETH M. MATUNHAY
SUC PRESIDENT I
SHEET NO:
A
2/8

1 NO POVERTY